


# METAL GUARD

**ITEM NO. CK-656**

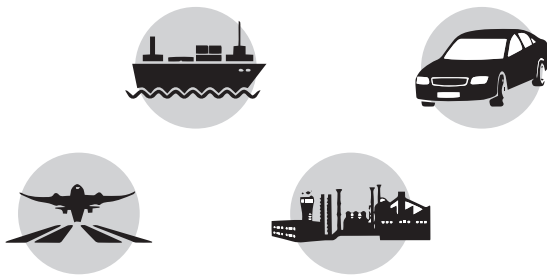

## Application

- Tool, Valve color classification
- Restoring a worn object
- Weathering of fabrics and wool
- Noise reduction
- Prevent rust and corrosion
- Insulation of tool electrical connections
- It can be applied to various areas such as wood, metal, glass, plastic, canvas, rubber, fiberglass, brick


## Ingredient

Butyl rubber / SEBS(Styrene-Ethyl-Buthyl-Styrene)Resin  
Toluene / Toluene (110-82-7), Methyl ethyl ketone(78-93-3)

## How to use

1. The surface to be coated should be clean, CC-303 (PERFECT CLEANER) Use to remove dust, oil and grease, stir the contents well or mix with a low speed mixer. No air bubbles should occur.
2. Coat with brush every 30~40 minutes. Allow to dry for 4 hours at 21°C for each coat.
3. When good peelability is required, it is ideal to apply about 3 times.
4. When peeling, peel it off easily by grasping the end of the product.

## ***Tough Rubber Coating Protects Flange Protects, Corrosion, Strip Away***

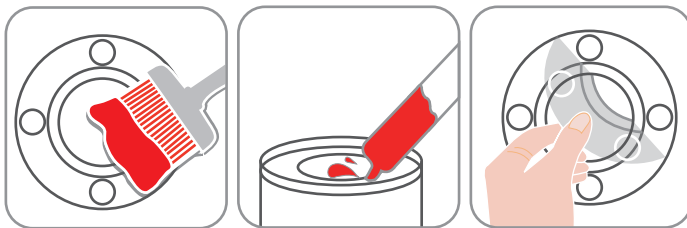

- Coating, Protection, Anti – Corrosion
- Easy strip away
- Hardening of the fast
- Use by Dipping, Spray or Brush
- Packing Unit
  - 420ml Aerosol type x 20EA/BOX
  - 4L Steel can x 4CAN/BOX

Manufacturer by : GHI CO.,Ltd. (Korea) 16gil 6 Jinjang, Bugku, Ulsan, Republic of Korea  
TEL : +82-52-297-2259 FAX : +82-52-298-2550 E-mail : hq@ghi.cc / stevenam9374@gmail.com

SUPPLIER : UNIVERSAL BIRD TRADING CO.,Ltd. (Yangon, Myanmar)

MP : 09-44476-7044 (Myanmar & English) / 09-44476-7045 (Korea & English) E-mail : salesmm.ghi@gmail.com